


## FHM


### FULL HEIGHT MARKERBOARD

#### SUGGESTED INSTALLATION INSTRUCTIONS FOR FULL HEIGHT MARKERBOARDS

Note: Complete installation hardware is included with each unit. If wall construction prevents the use of hardware as furnished, it is the responsibility of the customer to furnish the required fasteners. Glass suction cups required.

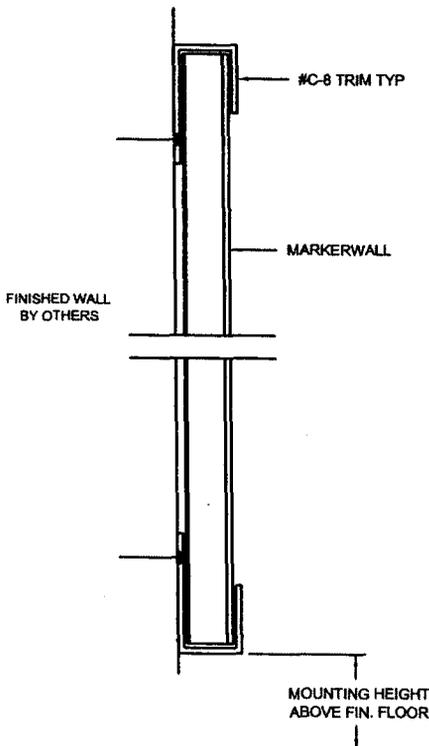

1. Cut trim oversized approximately  $\frac{3}{4}$ " so the board is free to push up into the top trim and drop down into the bottom trim.
2. Attach trim perimeter to wall with flathead counter sink screws at 16" o.c. intervals on jamb trim. *Note: If chalktray is bottom trim member, attach screws at 12" o.c.*
3. Insert a  $\frac{3}{8}$ " thick wood blocking into the bottom trim member so when the board is lifted into the top trim, the bottom edge of the board will drop into the bottom trim and rest on the blocking.
4. Apply adhesive to wall in egg-sized globs 16" o.c.
5. Insert first panel into trim section at top and let bottom edge drop into the bottom trim member (or chalktray) and slide to far left or right.
6. Insert steel spline into vertical edge groove of panel, installed on the wall, and repeat step 5 until all panels are within frame and position panels under trim in a left to right fashion.
7. Inspect surface of board for polyfilm. If polyfilm is present, remove before usage. Wash all markerboards and chalkboards prior to use.
8. Allow 24 to 48 hours for product to acclimate to building temperature before installation.

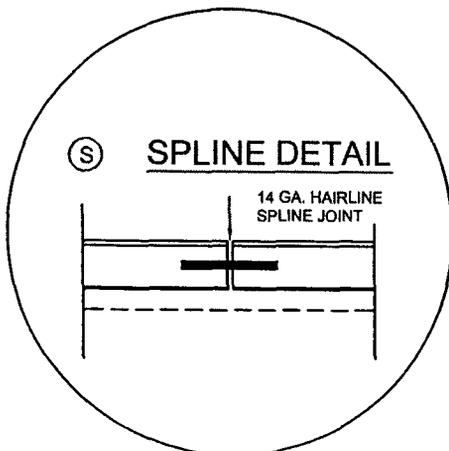

CHECK US OUT ONLINE AT:

**Indoff**  
140 WEST WYND TERRACE  
MIDDLETOWN, CT 06457  
(860) 632-2026  
FAX (860) 632-2028  
[www.ahutton.com](http://www.ahutton.com)