





Shown with optional balancer trolley (#0541100017) and tool clip (below)



**SERIES GM** 1 - 12 lb.  
**0.5 - 5.4 Kg** **TOOL POSITIONERS**


- Holds an object in desired position within 55" travel range without use of a ratchet or locking device
- Easy downward tool mobility
- Simple upward repositioning of load, requiring only a force equal to the weight of the suspended object
- Minimizes operator fatigue in high-cycle applications with light loads
- Easy tension adjustment by placing screwdriver or coin into slot of shaft. To increase tension, turn shaft clockwise; to decrease tension, turn counterclockwise
- For light duty use only

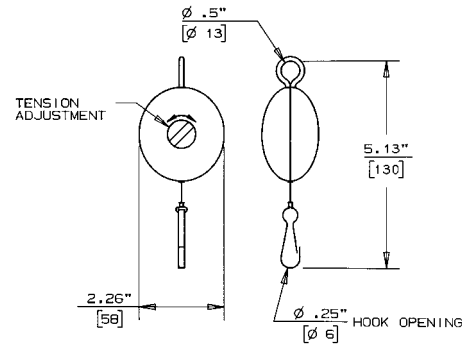

Model	Weight		Cable Travel	
	lbs.	Kg	ft.	m
GM31	1-12	.05-5.4	4.7	1.41

**SERIES RB** 1 - 4 lb.  
**0.5 - 1.8 Kg** **RETRACTORS**

- Heavy-duty, long-life spring for lasting performance
- Easy tension adjustment with no tools required
- Full range of motion with 360° swivel hanger
- Quick installation
- Durable nylon cable for long life and reduced maintenance
- Convenient snap-type tool clip for easy tool handling
- Alignment of hanger and tool hook for smooth, efficient use
- Optional safety chain- add suffix **-SC**

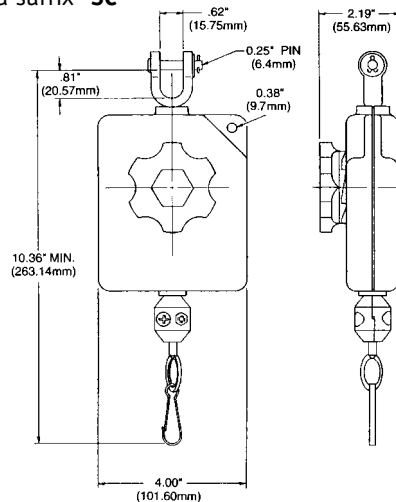


Model	Weight		Cable Travel	
	lbs.	Kg	ft.	m
RB2	1-2	0.5-0.9	5.2	2
RB4	2-4	0.9-1.8	5.2	2
RB210	1-2	0.5-0.9	10	2.54



**SERIES RF** 4 - 8 lb.  
**1.8 - 3.6 Kg** **RETRACTORS**


- Heavy-duty, long-life spring for lasting performance
- Easy tension adjustment with no tools required
- 360° forged steel swivel hanger for full range of motion
- Quick installation
- Durable nylon-covered steel cable provides consistent service & easy maintenance
- Alignment of hanger and tool hook for smooth, efficient use
- Simplified tool attachment and removal with convenient snap-type tool clip
- Ratchet lock available (on RFL models only) for free movement when required
- Optional safety chain- add suffix -SC

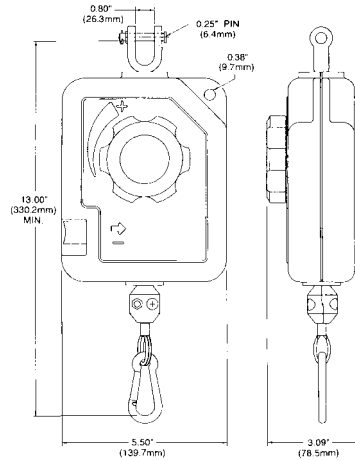

Model	Weight		Cable Travel	
	lbs.	Kg	ft.	m
RF6	4-6	1.8-2.7	6.6	2
RF8	6-8	2.7-3.6	6.6	2
RFL6	4-6	1.8-2.7	6.6	2
RFL8	6-8	2.7-3.6	6.6	2

**SERIES BF** 6 - 24 lb.  
**2.7 - 10.9 Kg** **BALANCERS**

- Heavy-duty, long-life spring for lasting performance
- Automatic lock prevents load from falling if spring loses tension
- Snap-type tool clip for simplified attachment and removal
- 360° swivel hanger
- High-impact composite housing for extra durability
- Optional ratchet lock (on BFL models) holds cable at desired position
- Shackle design instead of hook and spring clip provides extra-secure mounting
- Optional safety chain- add suffix -SC

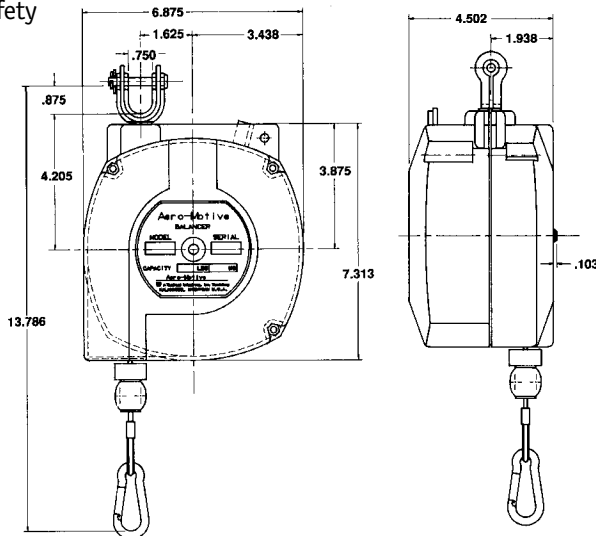

Model	Weight		Cable Travel	
	lbs.	Kg	ft.	m
BF6	3-6	1.4-2.7	6.6	2
BF9	6-9	2.7-4.1	6.6	2
BF13	9-13	4.1-5.9	6.6	2
BF18	13-18	5.9-8.2	6.6	2
BF24	18-24	8.2-10.9	6.6	2
BFL6	3-6	1.4-2.7	6.6	2
BFL9*	6-9	2.7-4.1	6.6	2
BFL13*	9-13	4.1-5.9	6.6	2
BFL18*	13-18	5.9-8.2	6.6	2
BFL24*	18-24	8.2-10.9	6.6	2

\*Models BFL are equipped with ratchet lock feature.